



TEKNIPIPE & SUPPLIES



CONDUCTING OUR
CLIENTS NEEDS

Monolayer pipelines

The TK P PE pipe line includes piping and fittings in sizes until 48" (1200 mm) and DR 7 -41

SMOOTH WALL PIPE SDR-7							
Work Pressure* PE 4710 23 bar (Kg/cm ²)							
Work Pressure* PE100 26.7 bar (Kg/cm ²)							
NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APPROX.	WEIGHT APROX.
MM	PULG.	mm	inches	inches	mm	KG/M.L.	Lb/ft
13	1/2	21.3	0.839	0.118	3.0	0.172	0.115
19	3/4	26.7	1.051	0.150	3.8	0.273	0.183
25	1	33.4	1.315	0.189	4.8	0.423	0.284
32	1 1/4	42.2	1.661	0.236	6.0	0.680	0.456
38	1 1/2	48.3	1.902	0.272	6.9	0.903	0.606
50	2	60.3	2.374	0.339	8.6	1.406	0.943
63	2 1/2	73.0	2.874	0.409	10.4	2.058	1.380
75	3	88.9	3.500	0.500	12.7	3.031	2.033
100	4	114.3	4.500	0.642	16.3	5.003	3.356
150	6	168.3	6.626	0.945	24.0	10.847	7.275
200	8	219.1	8.626	1.232	31.3	18.410	12.348
250	10	273.1	10.752	1.535	39.0	28.594	19.179
300	12	323.8	12.748	1.823	46.3	40.239	26.990
350	14	355.6	14.000	2.000	50.8	48.495	32.527
400	16	406.4	16.000	2.287	58.1	63.378	42.510
450	18	457.2	18.000	2.571	65.3	80.150	53.759
500	20	508.0	20.000	2.858	72.6	99.000	66.402
550	22	558.8	22.000	3.142	79.8	119.717	80.298
600	24	609.6	24.000	3.429	87.1	142.534	95.602
650	26	660.4	26.000				
700	28	711.2	28.000				
750	30	762.0	30.000				
800	32	812.8	32.000				
850	34	863.6	34.000				
900	36	914.4	36.000				
1000	40	1,016.0	40.000				
1050	42	1,066.8	42.000				
1200	48	1,219.2	48.000				

SMOOTH WALL PIPE SDR-7.3							
Work Pressure* PE 4710 21.9 bar (Kg/cm ²)							
Work Pressure* PE100 25 bar (Kg/cm ²)							
NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APPROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
13	1/2	21.3	0.839	0.114	2.9	0.167	0.112
19	3/4	26.7	1.051	0.146	3.7	0.267	0.179
25	1	33.4	1.315	0.181	4.6	0.415	0.278
32	1 1/4	42.2	1.661	0.228	5.8	0.660	0.443
38	1 1/2	48.3	1.902	0.260	6.6	0.862	0.578
50	2	60.3	2.374	0.327	8.3	1.352	0.907
63	2 1/2	73.0	2.874	0.394	10.0	1.974	1.324
75	3	88.9	3.500	0.480	12.2	2.932	1.967
100	4	114.3	4.500	0.618	15.7	4.851	3.253
150	6	168.3	6.626	0.909	23.1	10.510	7.049
200	8	219.1	8.626	1.181	30.0	17.776	11.923
250	10	273.1	10.752	1.472	37.4	27.622	18.527
300	12	323.8	12.748	1.748	44.4	38.871	26.072
350	14	355.6	14.000	1.917	48.7	46.833	31.412
400	16	406.4	16.000	2.197	55.8	61.300	41.116
450	18	457.2	18.000	2.465	62.6	77.403	51.917
500	20	508.0	20.000	2.744	69.7	95.724	64.205
550	22	558.8	22.000	3.016	76.6	115.738	77.629
600	24	609.6	24.000	3.287	83.5	137.651	92.327
650	26	660.4	26.000				
700	28	711.2	28.000				
750	30	762.0	30.000				
800	32	812.8	32.000				
850	34	863.6	34.000				
900	36	914.4	36.000				
1000	40	1,016.0	40.000				
1050	42	1,066.8	42.000				
1200	48	1,219.2	48.000				

SMOOTH WALL PIPE SPECIFICATIONS SDR-9							
Work Pressure* PE 4710 17 bar (Kg/cm ²)							
Work Pressure* PE100 20 bar (Kg/cm ²)							
NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APPROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
13	1/2	21.3	0.839	0.094	2.4	0.142	0.096
19	3/4	26.7	1.051	0.118	3.0	0.223	0.150
25	1	33.4	1.315	0.146	3.7	0.345	0.231
32	1 1/4	42.2	1.661	0.181	4.6	0.553	0.371
38	1 1/2	48.3	1.902	0.213	5.4	0.727	0.488
50	2	60.3	2.374	0.264	6.7	1.128	0.756
63	2 1/2	73.0	2.874	0.319	8.1	1.651	1.107
75	3	88.9	3.500	0.390	9.9	2.456	1.647
100	4	114.3	4.500	0.500	12.7	4.051	2.717
150	6	168.3	6.626	0.736	18.7	8.784	5.892
200	8	219.1	8.626	0.957	24.3	14.863	9.969
250	10	273.1	10.752	1.193	30.3	23.100	15.494
300	12	323.8	12.748	1.417	36.0	32.531	21.820
350	14	355.6	14.000	1.555	39.5	39.204	26.296
400	16	406.4	16.000	1.780	45.2	51.262	34.383
450	18	457.2	18.000	2.000	50.8	64.823	43.479
500	20	508.0	20.000	2.220	56.4	79.974	53.641
550	22	558.8	22.000	2.445	62.1	96.849	64.960
600	24	609.6	24.000	2.665	67.7	115.192	77.263
650	26	660.4	26.000	2.890	73.4	135.283	90.739
700	28	711.2	28.000	3.110	79.0	156.817	105.182
750	30	762.0	30.000	3.335	84.7	180.125	120.815
800	32	812.8	32.000	3.555	90.3	204.850	137.400
850	34	863.6	34.000				
900	36	914.4	36.000				
1000	40	1,016.0	40.000				
1050	42	1,066.8	42.000				
1200	48	1,219.2	48.000				

SMOOTH WALL PIPE SPECIFICATIONS SDR-11							
Work Pressure* PE 4710 14 bar (Kg/cm ²)							
Work Pressure* PE100 16 bar (Kg/cm ²)							
NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APPROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
13	1/2	21.3	0.839				
19	3/4	26.7	1.051	0.094	2.4	0.183	0.123
25	1	33.4	1.315	0.122	3.1	0.295	0.198
32	1 1/4	42.2	1.661	0.150	3.8	0.459	0.308
38	1 1/2	48.3	1.902	0.173	4.4	0.607	0.407
50	2	60.3	2.374	0.217	5.5	0.948	0.636
63	2 1/2	73.0	2.874	0.260	6.6	1.378	0.924
75	3	88.9	3.500	0.319	8.1	2.058	1.380
100	4	114.3	4.500	0.409	10.4	3.398	2.279
150	6	168.3	6.626	0.602	15.3	7.361	4.937
200	8	219.1	8.626	0.783	19.9	12.466	8.361
250	10	273.1	10.752	0.976	24.8	19.364	12.988
300	12	323.8	12.748	1.157	29.4	27.218	18.256
350	14	355.6	14.000	1.272	32.3	32.838	22.025
400	16	406.4	16.000	1.457	37.0	42.979	28.828
450	18	457.2	18.000	1.638	41.6	54.367	36.465
500	20	508.0	20.000	1.819	46.2	67.091	45.000
550	22	558.8	22.000	2.000	50.8	81.151	54.431
600	24	609.6	24.000	2.181	55.4	96.548	64.758
650	26	660.4	26.000	2.362	60.0	113.282	75.982
700	28	711.2	28.000	2.543	64.6	131.352	88.102
750	30	762.0	30.000	2.728	69.3	150.924	101.229
800	32	812.8	32.000	2.909	73.9	171.710	115.172
850	34	863.6	34.000	3.091	78.5	193.804	129.990
900	36	914.4	36.000	3.272	83.1	217.233	145.705
1000	40	1,016.0	40.000	3.638	92.4	268.362	179.999
1050	42	1,066.8	42.000				
1200	48	1,219.2	48.000				

Monolayer pipelines

The TK P PE pipe line includes piping and fittings in sizes until 48" (1200 mm) and DR 7 -41

SMOOTH WALL PIPE SPECIFICATIONS SDR-13.5							
Work Pressure* PE 4710 11 bar (Kgf/cm2)							
Work Pressure* PE100 12.8 bar (Kgf/cm2)							
NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
32	1 1/4	42.2	1.661	0.122	3.1	0.382	0.256
38	1 1/2	48.3	1.902	0.142	3.6	0.507	0.340
50	2	60.3	2.374	0.177	4.5	0.791	0.530
63	2 1/2	73.0	2.874	0.213	5.4	1.149	0.771
75	3	88.9	3.500	0.260	6.6	1.710	1.147
100	4	114.3	4.500	0.335	8.5	2.831	1.899
150	6	168.3	6.626	0.492	12.5	6.131	4.113
200	8	219.1	8.626	0.638	16.2	10.349	6.941
250	10	273.1	10.752	0.795	20.2	16.084	10.788
300	12	323.8	12.748	0.945	24.0	22.653	15.194
350	14	355.6	14.000	1.035	26.3	27.267	18.289
400	16	406.4	16.000	1.185	30.1	35.661	23.919
450	18	457.2	18.000	1.335	33.9	45.179	30.303
500	20	508.0	20.000	1.480	37.6	55.686	37.351
550	22	558.8	22.000	1.630	41.4	67.440	45.234
600	24	609.6	24.000	1.780	45.2	80.318	53.872
650	26	660.4	26.000	1.925	48.9	94.145	63.146
700	28	711.2	28.000	2.075	52.7	109.259	73.283
750	30	762.0	30.000	2.220	56.4	125.294	84.039
800	32	812.8	32.000	2.370	60.2	142.643	95.675
850	34	863.6	34.000	2.520	64.0	161.117	108.067
900	36	914.4	36.000	2.665	67.7	180.472	121.048
1000	40	1,016.0	40.000	2.965	75.3	223.016	149.584
1050	42	1,066.8	42.000	3.110	79.0	245.690	164.792
1200	48	1,219.2	48.000	3.555	90.3	320.948	215.270

SMOOTH WALL PIPE SPECIFICATIONS SDR-15.5							
Work Pressure* PE 4710 10 bar (Kgf/cm2)							
Work Pressure* PE100 11 bar (Kgf/cm2)							
NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
38	1 1/2	48.3	1.902	0.122	3.1	0.441	0.296
50	2	60.3	2.374	0.154	3.9	0.693	0.465
63	2 1/2	73.0	2.874	0.185	4.7	1.011	0.678
75	3	88.9	3.500	0.224	5.7	1.494	1.002
100	4	114.3	4.500	0.291	7.4	2.492	1.672
150	6	168.3	6.626	0.425	10.8	5.359	3.595
200	8	219.1	8.626	0.555	14.1	9.107	6.108
250	10	273.1	10.752	0.693	17.6	14.167	9.502
300	12	323.8	12.748	0.823	20.9	19.945	13.377
350	14	355.6	14.000	0.902	22.9	24.003	16.100
400	16	406.4	16.000	1.031	26.2	31.383	21.050
450	18	457.2	18.000	1.161	29.5	39.750	26.662
500	20	508.0	20.000	1.291	32.8	49.105	32.936
550	22	558.8	22.000	1.417	36.0	59.295	39.771
600	24	609.6	24.000	1.547	39.3	70.612	47.362
650	26	660.4	26.000	1.677	42.6	82.916	55.614
700	28	711.2	28.000	1.807	45.9	96.208	64.529
750	30	762.0	30.000	1.933	49.1	110.279	73.967
800	32	812.8	32.000	2.031	51.6	125.754	84.347
850	34	863.6	34.000	2.193	55.7	141.773	95.092
900	36	914.4	36.000	2.323	59.0	159.001	106.647
1000	40	1,016.0	40.000	2.579	65.5	196.144	131.560
1050	42	1,066.8	42.000	2.709	68.8	216.321	145.093
1200	48	1,219.2	48.000	3.098	78.7	282.780	189.669

SMOOTH WALL PIPE SPECIFICATIONS SDR-17							
Work Pressure* PE 4710 9 bar (Kgf/cm2)							
Work Pressure* PE100 10 bar (Kgf/cm2)							
NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
32	1 1/4	42.2	1.661	0.098	2.5	0.313	0.210
38	1 1/2	48.3	1.902	0.110	2.8	0.402	0.270
50	2	60.3	2.374	0.142	3.6	0.643	0.431
63	2 1/2	73.0	2.874	0.169	4.3	0.931	0.624
75	3	88.9	3.500	0.205	5.2	1.372	0.920
100	4	114.3	4.500	0.264	6.7	2.272	1.524
150	6	168.3	6.626	0.390	9.9	4.942	3.315
200	8	219.1	8.626	0.508	12.9	8.384	5.623
250	10	273.1	10.752	0.634	16.1	13.041	8.747
300	12	323.8	12.748	0.752	19.1	18.342	12.303
350	14	355.6	14.000	0.823	20.9	22.047	14.788
400	16	406.4	16.000	0.941	23.9	28.812	19.325
450	18	457.2	18.000	1.059	26.9	36.481	24.469
500	20	508.0	20.000	1.161	29.5	45.054	30.219
550	22	558.8	22.000	1.291	32.8	54.531	36.576
600	24	609.6	24.000	1.413	35.9	64.912	43.539
650	26	660.4	26.000	1.528	38.8	75.900	50.909
700	28	711.2	28.000	1.646	41.8	88.189	59.151
750	30	762.0	30.000	1.764	44.8	101.267	67.923
800	32	812.8	32.000	1.854	47.1	113.672	76.243
850	34	863.6	34.000	2.000	50.8	130.136	87.286
900	36	914.4	36.000	2.118	53.8	145.926	97.877
1000	40	1,016.0	40.000	2.354	59.8	180.218	120.878
1050	42	1,066.8	42.000	2.472	62.8	198.720	133.288
1200	48	1,219.2	48.000	2.823	71.7	259.311	173.928

SMOOTH WALL PIPE SPECIFICATIONS SDR-21							
Work Pressure* PE 4710 7 bar (Kgf/cm2)							
Work Pressure* PE100 8 bar (Kgf/cm2)							
NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
50	2	60.3	2.374	0.114	2.9	0.525	0.352
63	2 1/2	73.0	2.874	0.138	3.5	0.767	0.515
75	3	88.9	3.500	0.165	4.2	1.122	0.753
100	4	114.3	4.500	0.213	5.4	1.855	1.244
150	6	168.3	6.626	0.315	8.0	4.045	2.713
200	8	219.1	8.626	0.409	10.4	6.846	4.592
250	10	273.1	10.752	0.512	13.0	10.665	7.153
300	12	323.8	12.748	0.606	15.4	14.980	10.048
350	14	355.6	14.000	0.665	16.9	18.054	12.110
400	16	406.4	16.000	0.764	19.4	23.680	15.883
450	18	457.2	18.000	0.858	21.8	29.938	20.080
500	20	508.0	20.000	0.953	24.2	36.928	24.769
550	22	558.8	22.000	1.047	26.6	44.651	29.949
600	24	609.6	24.000	1.142	29.0	53.107	35.621
650	26	660.4	26.000	1.236	31.4	62.296	41.784
700	28	711.2	28.000	1.335	33.9	72.419	48.574
750	30	762.0	30.000	1.429	36.3	83.088	55.730
800	32	812.8	32.000	1.516	38.5	94.490	63.377
850	34	863.6	34.000	1.618	41.1	106.624	71.516
900	36	914.4	36.000	1.713	43.5	119.491	80.146
1000	40	1,016.0	40.000	1.906	48.4	147.712	99.075
1050	42	1,066.8	42.000	2.000	50.8	162.792	109.190
1200	48	1,219.2	48.000	2.287	58.1	212.775	142.715

Monolayer pipelines

The TK P PE pipe line includes piping and fittings in sizes until 48" (1200 mm) and DR 7 -41

**SMOOTH WALL PIPE
SPECIFICATIONS SDR-26**
Work Pressure* PE 4710 6 bar (Kg/cm2)
Work Pressure* PE100 7 bar (Kg/cm2)

NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
75	3	88.9	3.500	0.134	3.4	0.917	0.615
100	4	114.3	4.500	0.173	4.4	1.526	1.024
150	6	168.3	6.626	0.256	6.5	3.319	2.226
200	8	219.1	8.626	0.331	8.4	5.586	3.747
250	10	273.1	10.752	0.413	10.5	8.702	5.837
300	12	323.8	12.748	0.492	12.5	12.281	8.237
350	14	355.6	14.000	0.539	13.7	14.783	9.915
400	16	406.4	16.000	0.614	15.6	19.241	12.905
450	18	457.2	18.000	0.693	17.6	24.418	16.378
500	20	508.0	20.000	0.768	19.5	30.063	20.164
550	22	558.8	22.000	0.846	21.5	36.458	24.453
600	24	609.6	24.000	0.921	23.4	43.291	29.037
650	26	660.4	26.000	1.000	25.4	50.903	34.142
700	28	711.2	28.000	1.079	27.4	59.131	39.661
750	30	762.0	30.000	1.154	29.3	67.753	45.444
800	32	812.8	32.000	1.224	31.1	77.198	51.779
850	34	863.6	34.000	1.307	33.2	87.009	58.359
900	36	914.4	36.000	1.386	35.2	97.671	65.511
1000	40	1,016.0	40.000	1.539	39.1	120.549	80.856
1050	42	1,066.8	42.000	1.614	41.0	132.735	89.029
1200	48	1,219.2	48.000	1.846	46.9	173.519	116.385

**SMOOTH WALL PIPE
SPECIFICATIONS SDR-32.5**
Work Pressure* PE 4710 4 bar (Kg/cm2)
Work Pressure* PE100 5 bar (Kg/cm2)

NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
75	3	88.9	3.500	0.108	2.7	0.735	0.493
100	4	114.3	4.500	0.138	3.5	1.225	0.821
150	6	168.3	6.626	0.204	5.2	2.678	1.796
200	8	219.1	8.626	0.265	6.7	4.494	3.014
250	10	273.1	10.752	0.331	8.4	7.021	4.709
300	12	323.8	12.748	0.392	10.0	9.908	6.646
350	14	355.6	14.000	0.431	10.9	11.864	7.957
400	16	406.4	16.000	0.492	12.5	15.547	10.428
450	18	457.2	18.000	0.554	14.1	19.727	13.232
500	20	508.0	20.000	0.615	15.6	24.255	16.268
550	22	558.8	22.000	0.677	17.2	29.414	19.729
600	24	609.6	24.000	0.738	18.8	34.891	23.402
650	26	660.4	26.000	0.800	20.3	41.030	27.520
700	28	711.2	28.000	0.862	21.9	47.665	31.971
750	30	762.0	30.000	0.923	23.4	54.573	36.604
800	32	812.8	32.000	0.985	25.0	62.188	41.712
850	34	863.6	34.000	1.046	26.6	70.301	47.153
900	36	914.4	36.000	1.108	28.1	78.639	52.746
1000	40	1,016.0	40.000	1.231	31.3	97.199	65.194
1050	42	1,066.8	42.000	1.292	32.8	107.090	71.829
1200	48	1,219.2	48.000	1.477	37.5	139.924	93.851

**SMOOTH WALL PIPE
SPECIFICATIONS SDR-41**
Work Pressure* PE 4710 3.4 bar (Kg/cm2)
Work Pressure* PE100 4 bar (Kg/cm2)

NOMINAL SIZE (IPS)		DIAMETER (EXTERNAL)	DIAMETER (EXTERNAL)	WALL THICKNESS	WALL THICKNESS	WEIGHT APROX.	WEIGHT APROX.
MM	PULG.	mm	INCHES	INCHES	mm	KG/M.L.	Lb/ft
150	6	168.3	6.626	0.161	4.1	2.127	1.426
200	8	219.1	8.626	0.209	5.3	3.579	2.401
250	10	273.1	10.752	0.264	6.7	5.638	3.782
300	12	323.8	12.748	0.311	7.9	7.883	5.288
350	14	355.6	14.000	0.343	8.7	9.533	6.394
400	16	406.4	16.000	0.390	9.9	12.400	8.317
450	18	457.2	18.000	0.441	11.2	15.779	10.583
500	20	508.0	20.000	0.488	12.4	19.412	13.021
550	22	558.8	22.000	0.535	13.6	23.422	15.710
600	24	609.6	24.000	0.587	14.9	27.991	18.774
650	26	660.4	26.000	0.634	16.1	32.768	21.978
700	28	711.2	28.000	0.681	17.3	37.920	25.434
750	30	762.0	30.000	0.732	18.6	43.678	29.296
800	32	812.8	32.000	0.768	19.5	49.598	33.267
850	34	863.6	34.000	0.831	21.1	56.154	37.664
900	36	914.4	36.000	0.878	22.3	62.842	42.150
1000	40	1,016.0	40.000	0.976	24.8	77.650	52.082
1050	42	1,066.8	42.000	1.024	26.0	85.481	57.335
1200	48	1,219.2	48.000	1.169	29.7	111.596	74.851

NOTE 1: DIAMETERS NOT INCLUDED IN THIS TABLE ARE CONSIDERED SPECIAL.

NOTE 2: IN CASE OF REQUIRING SPECIAL MANUFACTURING, PLEASE CONTACT THE SALES AREA: INFO@TKP.MX

NOTE 3: EXPRESSED WEIGHTS ARE ONLY APPROXIMATE AND INFORMATIVE, AND DO NOT CONSTITUTE A SPECIFICATION.

**PE100 work pressure according to Mexican Standard NMX E-18-2012

* Work pressure @73°F



Contact us,
we are here to help you.

Offices

10777 Westheimer
Suite 1100
Houston Tx 77042


+1 (713) 470 1192

Headquarter Plant

Av. Tecnológico #483
Monterrey Technology Park
Ciénega de Flores, N.L.
C.P. 65550, México

+52 (81) 8384 7310

info@tkp.mx

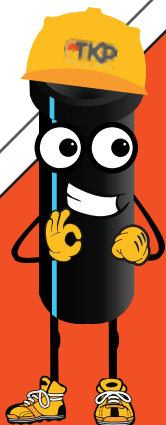

Follow us on Facebook!



/ Tkp inc. - Teknipipe & Supplies



/ FIMEX - Fluidos Industriales Mexicanos

www.tkp.mx